

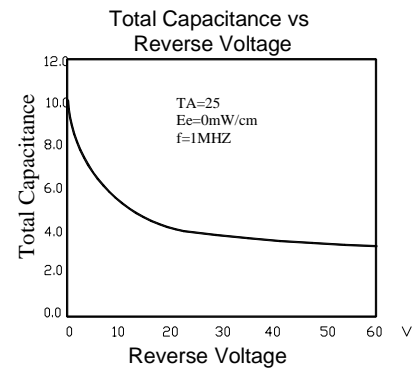

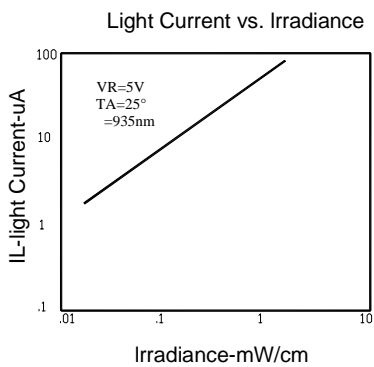
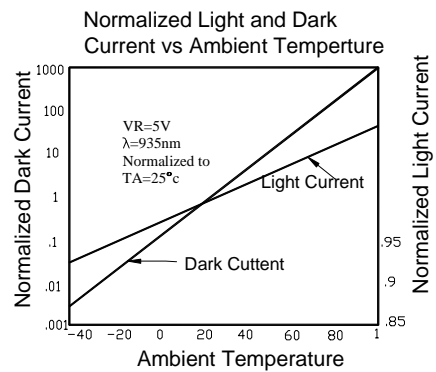
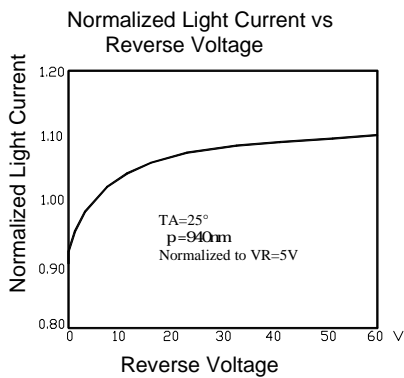


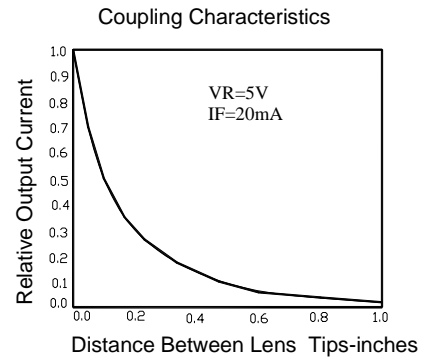


Storage $O(1)$ Stoerter befr


Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

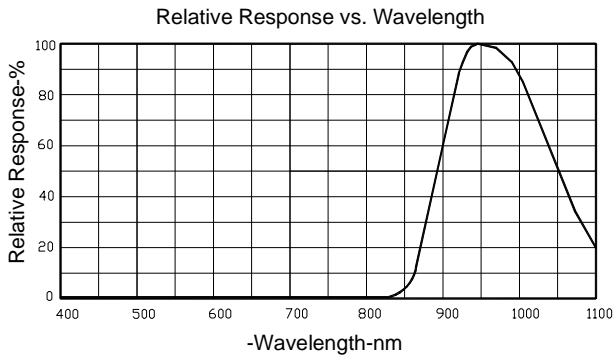

Sensitivity Diagram

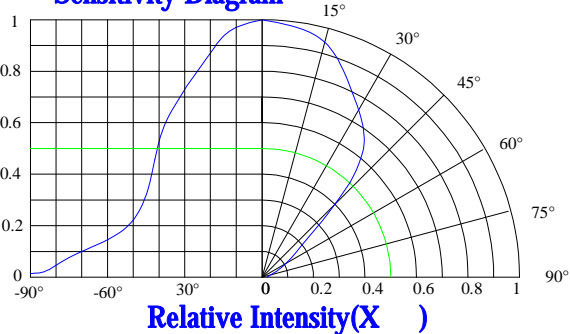

Sensitivity Diagram

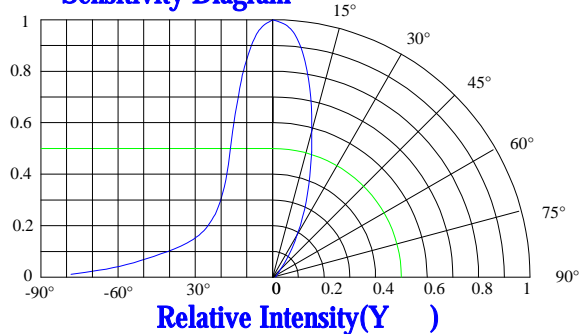





Infrared Photo Diode Specification

●Commodity: Infro6 -9.550-6 -4.072 3.24 0 0 1 1 2.13.24 64 c 479 c44 64 re /G7 -8.28h7

Label Explanation

LIGHT Universal Label

LIGHT Light Electronics CO., LTD.	
MODEL NAME: _____	 LOT NO. :
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
REMARKS: _____	

Customer Defined Label



Carrier Tape Specifications (Loaded Quantity: 2300pcs/reel)

ITEM	W	A0	A1	B0	B1	K0	E	F	D0	D1	P0	P1	P2	T
DI M	12.00	4.35	2.05	4.40	4.10	3.65	1.75	5.50	1.50	1.60	4.00	8.00	2.00	0.30
TOL	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05

