




SL-T3020IRC050-L223-C-S





Features

Package Dimension

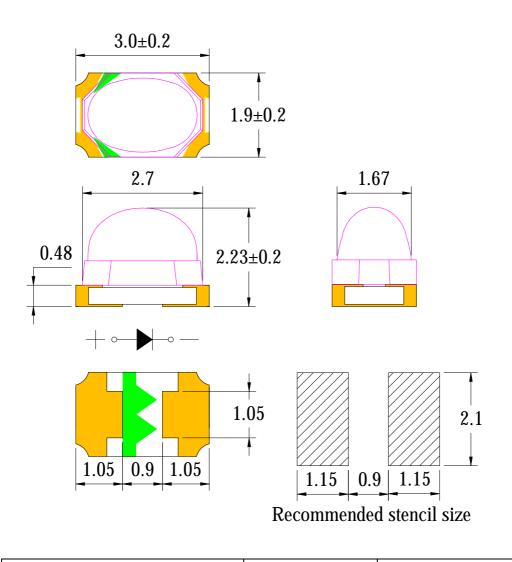

Notes:

Part No.	SL-T3020IRC050-L223-C-S	Page	2 of 9
----------	-------------------------	------	--------



LIGHT ELECTRONICS CO., LTD.




solute Maximum Ratings at Ta=25	1	<u> </u>	
		l	
2. Peak Forward Current:3. Caution in ESD:			
nrt No. SL-T3020IRC050-L223-C-S		Page	3 of 9

LIGHT ELECTRONICS CO., LTD.



Part No. SL-T3020IRC050-L223-C-S	Page	4 of 9
----------------------------------	------	--------



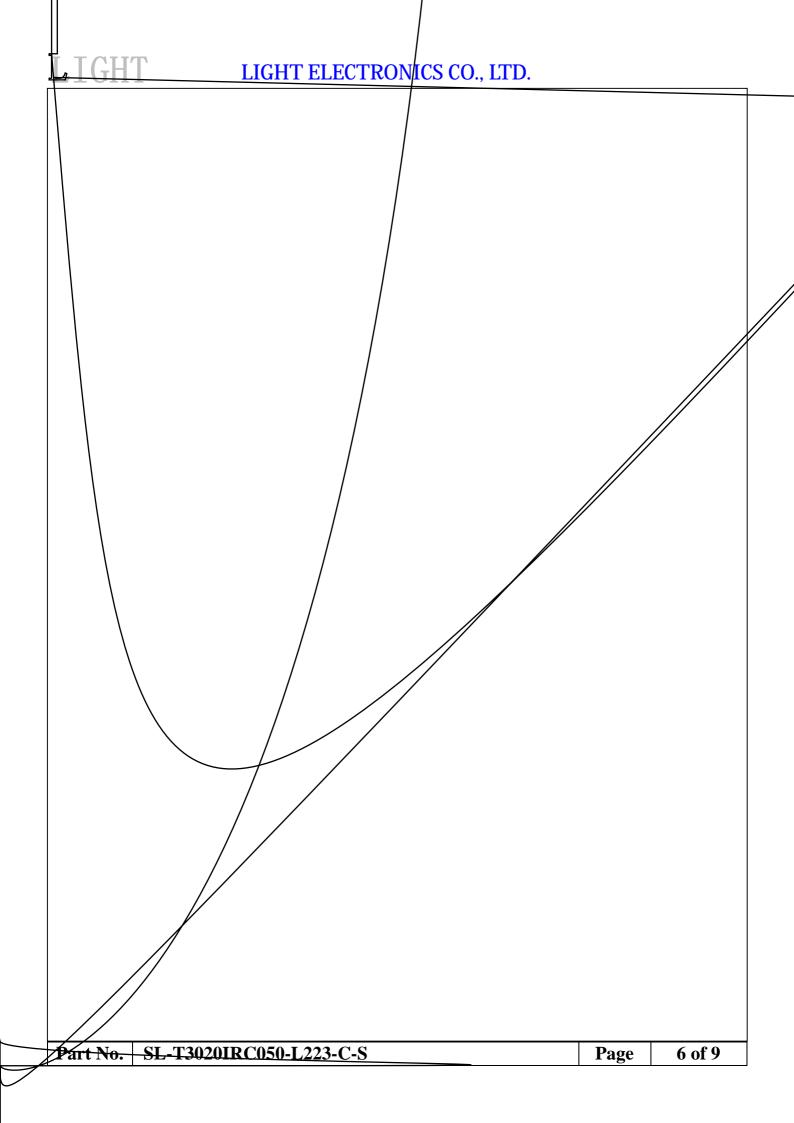



LIGHT ELECTRONICS CO., LTD.




Moisture Resistant Packaging		
Note:		
Carrier Tape Specifications (Loaded Quantity: 5000pcs/ree	,	






Suggest IR Reflow Condition For Lead Free

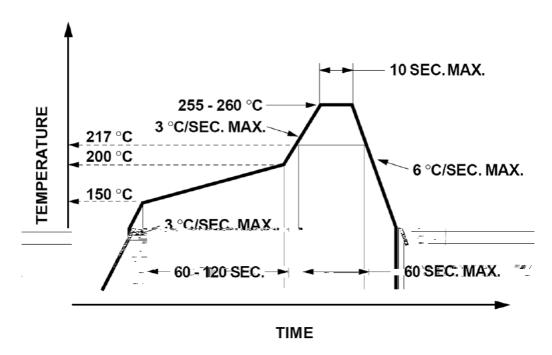

Soldering iron

Repairing

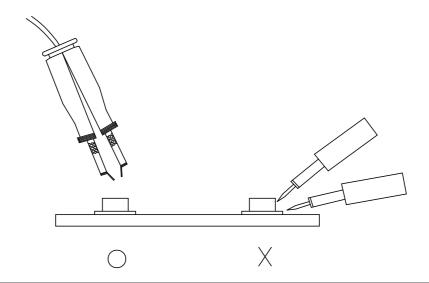

 Part No.
 SL-T3020IRC050-L223-C-S
 Page
 9 of 9