

Infrared Photo Diode Specification

Commodity: Infrared Photo diode


Reverse Light Current Bin Limits

BIN CODE	Min.(μ A)	Max.(μ A)
1	26	31
2	31	37
3	37	44
4	44	53

NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Explanation

LIGHT Universal Label

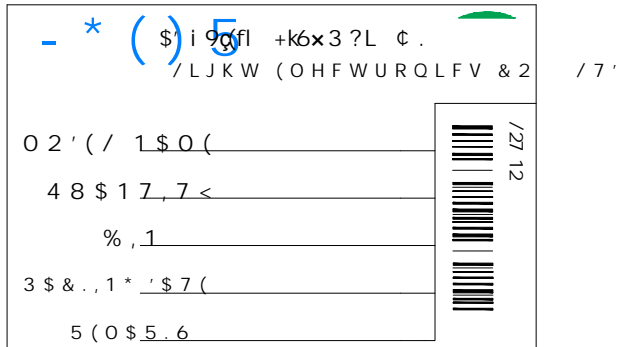

- * () 5
 \$ i 9 g f l + k 6 x 3 ? L ¢ .
 / L J K W (O H F W U R Q L F V & 2 / 7 '

0 2 ' (/ 1 \$. 0 (_____
 4 8 \$ 1 7 , 7 < _____
 % , 1 _____
 3 \$ & . , 1 * ' \$ 7 (_____
 5 (0 \$ 5 . 6 _____

/ 21 12
 / 7 '

Customer Defined Label



RoHS

Y ÷ ` -
 f H
 1 4 Y
 ; > B U
 Ø m ~ -

Carrier Tape Specifications (Loaded Quantity: 2200pcs/reel)



Note: Tolerance unless mentioned is $\pm 0.1\text{mm}$; Unit = mm

Moisture Resistant Packaging

